


## 1.1.1 DOSATec Solenoid diaphragm dosing pump HCL

Solenoid diaphragm dosing pump for the exact dosing of liquid media.

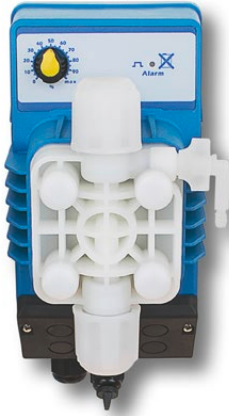

### Product description:

- Capacity: 0 ... 5 l/h
- Pressure range: 0 ... 10 bar
- Pump head material: PVDF
- Seals material: Viton®, EPDM
- Diaphragm material: PTFE (coated)
- Power supply: 100 ... 230 V AC
- Alternative power supply: 24 V AC, 24 V DC
- Manual pump head ventilation valve
- Input for level control
- Suitable for wall mounting
- Manual adjustment of stroke frequency (0 ... 20 %, 0 ... 100 %)
- Available languages: DE, EN, FR

### Areas of application:

- Dosing of small and medium fluid volumes (water treatment, process industry, acids, bases, flocculants, precipitants, ...)

### Scope of supply:

- Solenoid diaphragm dosing pump **DOSATec HCL**, accessory set (foot valve, hose, injection valve, level switch), connection cable end open

### Ordering data:

- Dosing pump **HCL** with **PVDF** pump head and **Viton®** seals

Type:	Dosing capacity: l/h	Pressure range: bar	Max. stroke frequency: 1/min.	Hose connection: mm	Item number:
<b>DOSATec HCL</b> PVDF Viton®	1.0	10	160	4 x 6	40230103
	2.0				
	3.0	8			
	5.0				

- Dosing pump **HCL** with **PVDF** pump head and **EPDM** seals

Type:	Dosing capacity: l/h	Pressure range: bar	Max. stroke frequency: 1/min.	Hose connection: mm	Item number:
<b>DOSATec HCL</b> PVDF EPDM	1.0	10	160	4 x 6	40230153
	2.0				
	3.0	8			
	5.0				

Viton® is the registered trademark for DuPont Dow Elastomer.

Subject to technical modifications and printing errors. Images may vary slightly from actual product.  
21-11-2017